# MEEKS BAY MARINA STORM WATER POLLUTION PREVENTION PLAN

This Storm Water Pollution Prevention Plan (SWPPP) for the Meeks Bay Marina is submitted to the Lahontan Regional Water Quality Control Board (Lahontan RWQCB) in compliance with Board Order No. 6-00-36, National Pollutant Discharge Elimination System General Permit NPDES CA CAG616003, for discharges of storm water runoff associated with industrial activity at marinas on Lake Tahoe. This SWPPP has been designed to comply with Federal requirements to implement best management practices (BMPS) to achieve compliance with effluent limits and receiving water objectives.

### 1. Objectives

The SWPPP has been developed, and will be amended when necessary, to meet the following objectives:

- a. to identify and evaluate sources of pollutants associated with industrial activities being conducted at the facility that may affect the quality of storm water discharges and prevent non-storm water discharges from the facility; and,
- b. to identify and implement site-specific best management practices (BMPs) to reduce or prevent pollutants associated with industrial activities in storm water discharges and nonstorm water discharges.

BMPs may include a variety of pollution prevention measures or other low-cost and pollution control measures. They are generally categorized as non-structural BMPs (activity schedules, prohibitions of practices, maintenance procedures, and other low-cost measures) and as structural BMPs (treatment measures, runoff controls, overhead coverage.)

### 2. Planning and Organization

### a. Pollution Prevention Team

The Meeks Bay Marina storm water pollution prevention team consists of Bob Hassett, Marina Operator, who is responsible for overall operations, and Ed Oliver, Marina Manager, who is responsible for daily operations and employee training and supervision.

### b. Other Requirements and Existing Facility Plans

The following other plans and reports for regulatory agencies are incorporated by reference into this SWPPP:

i. Meeks Bay Marina Storm Water Monitoring Plan prepared for and submitted to the Lahontan RWQCB per Board Order No. 6-00-36 and National Pollutant Discharge Elimination System General Permit NPDES CA CAG616003. This plan includes

monitoring programs assure compliance with storm water discharge requirements and non-storm water discharge restrictions.

### 3. Site Map

Figure 1 - Meeks Bay Marina Layout Diagram identifies the parking lot, marina office, boat ramp and slips which comprise the marina. Currently, there are no storm water collection and treatment facilities on-site. There are no municipal storm drain facilities serving the site.

The marina shares the site of the Meeks Bay Resort which is a much larger facility to the north of the marina portion of the site. There may be some storm water run-on from the resort campsites adjacent to the marina. Since these areas are essentially unimproved and no "industrial activity" occurs there, no additional pollutants are expected to be conveyed by run-on water.

As a recreational boating marina, little, if any "industrial activity," occurs on the site. There is no fueling, and repair/maintenance is limited to slip holders working on their own boats. Rental boats are transferred to other facilities with repair stations for maintenance and repair. A steel cabinet to collect used oil from private boat owners is located behind the marina office. This collection point is a part of the oil collection program implemented by El Dorado County and other resource protection agencies.

No erodible "industrial activity" materials are directly exposed to precipitation and no significant spills or leaks have occurred.

### 4. List of Significant Materials

There are no significant materials handled and stored at the site.

### 5. Description of Potential Pollutant Sources

The "industrial activity" occurring at the marina is the mooring and operation of water craft. These activities do not have significant potential to contribute pollutants to storm water run-off. These activities are conducted in compliance with the applicable BMPs (non-fueling) listed in Attachments F and G from the General Permit.

The parking lot can collect oil and sands deposited by vehicles parked in the lot. These pollutants could be then washed off with storm water. Also, since the parking lot is unpaved, significant storm water flows will errode the parking area itself. Run-off from the parking lot drains both to the noth and south. Southerly flows drain into the water of the marina. Parking barriers are in place to control vehicle travel within the parking lot.

### 6. Assessment of Potential Pollutant Sources

The only potential pollutant source is the non-BMPed parking lot.

### 7. Storm Water Best Management Practices

The marina parking lot, as well as the entire Meeks Bay Resort, requires retro-fitting with storm water BMPs to comply with the provisions of the General Permit and other regulations. The resort property is owned by the US Forest Service which has permitted the Washoe Tribe of California and Nevada to operate the facility. The marina is operated under a sublease from the Tribe. As a condition of the permit to operate, the Tribe has been directed to prepare and implement a BMP retrofit plan for the entire property, including the marina. BMPs at the marina are expected to include paving of the parking lot and access road, storm water collection, treatment and infiltration facilities.

Once the overall BMP plan is approved, this SWPPP will be amended to include the specific improvements required in the marina portion of the site. As the improvements are constructed, this plan will continued to be amended to include BMP maintenance provisions.

In addition, non-structural BMPs, consisting of the following processes, prohibitions, procedures, schedule of activities, *etc.*, that prevent pollutants associated with industrial activity from contacting with storm water discharges and authorized non-storm water discharges, have been considered and adopted:

- a. Good Housekeeping Good housekeeping generally consists of practical procedures to maintain a clean and orderly facility. The parking lot and all other areas (ramp, docks, etc.) with the potential to release pollutants to storm water or directly to Lake Tahoe are kept orderly and clean.
- b. Preventive Maintenance Preventive maintenance includes the regular inspection and maintenance of structural storm water controls (catch basins, oil/water separators, etc.) as well as other facility equipment and systems. The components of the drainage system (although unimproved) are monitored per the prescribed schedule in the Meeks Bay Marina Monitoring Plan as required by the General Permit.
- c. Spill Response This includes spill clean-up procedures and necessary clean-up equipment based upon the quantities and locations of significant materials that may spill or leak. Since no significant materials are stored on-site, only minimal clean-up equipment is required.
- d. Material Handling and Storage This includes all procedures to minimize the potential for spills and leaks and to minimize exposure of significant materials to storm water and authorized non-storm water discharges. Again, the absence of significant materials precludes the need for special handling and storage procedures.
- e. Employee Training This includes training of personnel who are responsible for (1) implementing activities identified in the SWPPP, (2) conducting inspections, sampling, and visual observations, and (3) managing storm water. All new hires are instructed in spill prevention, spill response and clean-up, and spill reporting at the beginning of their employment. Walk-through inspections of marina facilities are conducted weekly and

used as continuing training sessions for employees.

- f. Waste Handling/Recycling This includes the procedures or processes to handle, store, or dispose of waste materials or recyclable materials. Privately generated used oil is stored and disposed of through the County collection and recycling program.
- g. Record Keeping and Internal Reporting This includes the procedures to ensure that all records of inspections, spills, maintenance activities, corrective actions, visual observations, etc., are developed, retained, and provided, as necessary, to the appropriate facility personnel. Inspection checklists have been included with the Monitoring Plan to provide records of inspections completed, any problems found and actions taken to fix those problems. Records are kept on-site in the marina office.
- h. Erosion Control and Site Stabilization This includes a description of all sediment and erosion control activities. "Industrial activities" subject to storm water run-off are limited to the parking lot. This are will be subject to future improvement with required BMPs in conjunction with the retro-fit program for the entire resort.
- i. Inspections This includes, in addition to the preventative maintenance inspections identified above, an inspection schedule of all potential pollutant sources. Inspections are included in the Monitoring Plan.
- j. Quality Assurance This includes the procedures to ensure that all elements of the SWPPP and Monitoring Program are adequately conducted. Quality assurance is implemented by the Marina Manager who oversees all operations at the marina.

### 8. Annual Comprehensive Site Compliance Evaluation

Annual comprehensive site compliance evaluations are completed in the Fall in conjunction with the annual reporting requirement of the General Permit and Spring during the site visit inspection by Lahontan RWQCB staff. The Annual Report provides a written record of inspections, evaluations and activities at the marina. It also provides certification that the facility operator is in compliance with the General Permit. If the certification cannot be provided, this is explained in the Annual Report.

### 9. SWPPP General Requirements

The following general requirements for all SWPPPs are established by the Lahontan RWQCB:

- a. The SWPPP shall be retained on site and made available upon request of a representative of the Regional Board.
- b. The SWPPP shall identify the existing storm water BMPs already in place at the marina [see Sec. 7 above] and new BMPs [parking lot retro-fit] that are needed at the marina in order to further reduce and prevent pollutants in storm water and non-storm water discharges. The new BMPs that are identified by the marina operator in the SWPPP shall be

implemented by October 15, 2003.

- c. The Regional Board may notify the facility operator when the SWPPP does not meet one or more of the minimum requirements of this section. As requested by the Regional Board the facility operator shall submit a SWPPP revision and implementation schedule that meets the minimum requirements of this Section to the Regional Board. Within 14 days after implementing the required SWPPP revisions, the facility operator shall provide written certification to the Regional Board that the revisions have been implemented.
- d. The SWPPP shall be revised, as appropriate, and implemented prior to changes in industrial activities which (i) may significantly increase the quantities of pollutants in storm water discharge, (ii) cause a new area of industrial activity at the facility to be exposed to storm water, or (iii) begin an industrial activity which would introduce a new pollutant source at the facility.
- e. The SWPPP should also be amended if it is in violation of any condition of this General Permit, or has not achieved the general objectives of controlling pollutants in storm water discharges. The amended SWPPP shall be submitted no later than 30 days after the determination of violation or non-achievement to the Regional Board Executive Officer for review and approval.


### 10. Public Access

The SWPPP is considered a report that shall be available to the public under Section 308(b) of the Clean Water Act. Upon request by members of the public, the marina operator shall make available for review a copy of the SWPPP directly to the requester.

### 11. Preparer

This SWPPP was prepared by: Jay Kniep, AICP, Consultant/Agent for Marina Operator and initially submitted to the Regional Board on November 15, 2000.

Signature:

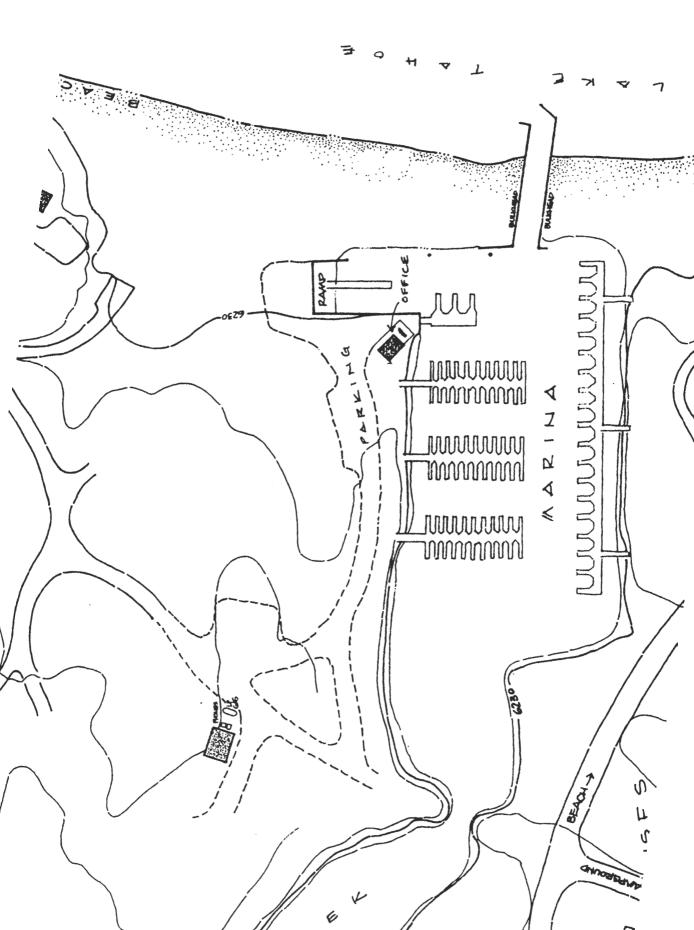

### MEEKS BAY MARINA MONITORING PROGRAM

### 1. Introduction

This Monitoring Program for the Meeks Bay Marina is submitted to the Lahontan Regional Water Quality Control Board (Lahontan) in compliance with Board Order No. 6-00-36, National Pollutant Discharge Elimination System General Permit NPDES CA CAG616003, for discharges of storm water runoff associated with industrial activity and maintenance dredging at marinas. This Monitoring Program establishes procedures to implement the requirements of the Lahontan Board Order at Meeks Bay Marina

The Meeks Bay Marina is on the site of the Meeks Bay Resort which is owned by the United States Forest Service (USFS). The resort and marina are operated under a Special Use Permit issued by the USFS to the Washoe Tribe of California and Nevada. The marina is operated under a sublease from the Tribe to Action Watersports of Tahoe, Inc., owned by Bob Hassett (Marina Operator). The Marina Manager, Ed Oliver, is the person on-site responsible for implementing this Monitoring Program. The marina layout and drainage areas are identified in Map 1, attached.

None of the overall site, including the marina portion, has been retro-fitted with drainage systems complying with the Best Management Practices (BMPs) mandated by Lahontan and the Tahoe Regional Planning Agency. The planning, design and construction of such a system is a priority of the USFS and Marina Operator, and will be addressed in the Storm Water Pollution Prevention Plan to be prepared for the marina. Currently, storm water run-off from compacted and impervious areas discharges to groundwater and/or directly to Lake Tahoe without treatment.

### 2. Objectives

The objectives of the monitoring program are to:

- a. Ensure that storm water discharges, non-storm water discharges, and discharges associated with maintenance dredging are in compliance with the Discharge Prohibitions, Effluent Limitations, and Receiving Water Limitations specified in the General Permit.
- b. Ensure practices at the marina to reduce or prevent pollutants in surface water discharges, storm water discharges, and non-storm water discharges are evaluated and revised to meet changing conditions.
- c. Aid in the implementation and revision of the Storm Water Pollution Prevention Plan (SWPPP) for the marina.
- d. Measure the effectiveness of best management practices (BMPS) to prevent or reduce pollutants in storm water discharges.

### 3. Non-storm Water Discharge Visual Observations

- a. The Marina Operator will visually observe the boat ramp and marina parking lot area for the presence of unauthorized non-storm water discharges;
- b. The visual observations will occur monthly, during daylight hours, on days with no storm water discharges, and during scheduled marina operating hours. Observations will be made during each month that the marina is operating (typically mid-May through early October); and,
- c. Records of visual observations (Worksheet on page B-1) will document the presence of any discolorations, stains, odors, floating materials, *etc.*, as well as the source of any non-storm discharge observed. Records will be maintained including visual observation dates, locations observed, conditions observed, and response taken to eliminate unauthorized non-storm water discharges and to reduce or prevent pollutants from contacting non-storm water discharges. The SWPPP will be revised, as necessary, and implemented in accordance with the General Permit.

### 4. Storm Water Discharge Visual Observations

- a. The Marina Operator will visually observe storm water discharges from four storm events per operating season of the marina. These visual observations will occur during the first hour of discharge and at all discharge locations.
- b. Visual observations are only required of storm water discharges that occur during daylight hours that are preceded by at least three working days without storm water discharges and that occur during scheduled marina operating hours.
- c. Visual observations will document the presence of any floating and suspended material, oil and grease, discolorations, turbidity, odor, and source of any pollutants. Records will be maintained of observation dates, locations observed, observations, and response taken to reduce or prevent pollutants in storm water discharges (Worksheet on page B-2). The SWPPP will be revised, as necessary, and implemented in accordance with the General Permit.

### 5. Storm Water and Surface Water Sampling and Analysis

a. The Marina Operator will collect storm water samples during the first hour of discharge from (1) the first storm event during the marina's operating season, and (2) at least one other storm event during the marina's operating season. Sampling will occur at the boat ramp entering the inner marina (Lake Tahoe) and the marina parking lot area draining to the inner marina. If samples from the first storm event are not collected, samples from two other storm events during the marina's operating season will be collected. The Annual Report will explain why the first storm event was not sampled.

- b. Sample collection is only required of storm water discharges that occur during scheduled marina operating hours and that are preceded by at least three working days without storm water discharge.
- c. The samples will be analyzed for:
  - i. Turbidity, pH, specific conductance, total phosphorus (reporting limit for total phosphorus shall be 0.008 mg/L as total P), and total nitrogen (reporting limit for total nitrogen shall be 0.15 mg/L).
- d. The Marina Operator will collect a surface sample from Lake Tahoe from the lakeward end of the docks on July Fourth and Labor Day. The sample will be analyzed for benzene, toluene, ethylbenzene, total xylenes, and fuel oxygenates including methyl tertiary butyl ether (MTBE), tert-butyl alcohol (TBA), tertiary amyl methyl ether (TAME), di-isopropyl ether (DIPE), and ethyl tert-butyl ether (ETBE) using drinking water standards (524.2 GCMS). If these pollutants are not detected in significant quantities after four sampling events, the pollutant may be eliminated from future sample analysis or until the pollutant is likely to be present again.
- e. Sampling will be documented using the Worksheet on page B-3.

### 6. Storm Water Discharge Locations

The requirements of the General Permit are listed below with the Meeks Bay Marina response shown in italics.

- a. The Marina Operator will visually observe and collect samples of storm water discharges from all drainage areas that represent the quality and quantity of the marina's storm water discharges from the storm event.
  - There are two generalized drainage areas at the marina, the unimproved parking lot and concrete boat ramp. Because the parking lot is not graded and hard surfaced, drainage patterns are variable. However, with sufficient rainfall, run-off will flow south into the inner marina at one or more locations. Sampling and observations will be made at this (these) point(s). The boat ramp area discharges storm water to the inner marina due to its gradient into the water for boat launching. Sheet flow on the ramp will be observed and sampled.
- b. If the marina's storm water discharges are commingled with run-on from surrounding areas, the marina operator should identify other visual observation and sample collection locations that have not been commingled by run-on and that represent the quality and quantity of the marina's storm water discharges from the storm event. The marina operator may also choose to collect a sample up gradient of the marina influence and then down gradient of the marina prior to discharge.

There appears to be no run-on from the resort property to the marina. Run-off from the ramp and parking area is directly attributable to the marina and indicative of marina activities.

c. If visual observation and sample collection locations are difficult to observe or sample (e.g., sheet flow, submerged outfall), marina operators shall identify and collect samples from other locations that represent the quality and quantity of the marina's storm water discharges from the storm event.

The designated observation and sampling locations are readily accessible.

d. Marina operators that determine that the industrial activities and BMPs within two or more drainage areas are substantially identical may either (I) collect samples from a reduced number of substantially identical drainage areas, or (ii) collect samples from each substantially identical drainage area and analyze a combined sample from each substantially identical drainage area. Marina operators must document such a determination in the Annual Report.

Not applicable to Meeks Bay Marina.

### 7. Visual Observation and Sample Collection Exceptions

The Marina Operator is prepared to collect samples and conduct visual observations at the beginning of marina's operating season and throughout the marina's operating season until the minimum requirements of Sections 4 and 5 are completed with the following exceptions:

a. Sampling and visual observations may not be conducted due to dangerous weather conditions, such as flooding, electrical storm, etc.; when storm water discharges begin after scheduled marina operating hours; or, when storm water discharges are not preceded by three working days without discharge. Visual observations are only required during daylight hours. If the required samples or visual observations are not made during an operating season due to these exceptions, an explanation in the Annual Report as to why the sampling or visual observations could not be conducted will be provided.

### 8. Monitoring Methods

- a. This monitoring program satisfies the objectives listed in Section 2 by directly implementing the scope and monitoring requirements outlined in the General Permit. All components of the visual observation and sampling program are consistent with the standards established by the Regional Board in the Monitoring and Reporting Program of the General Permit. All samples will be analyzed by a licensed laboratory using methods specified by the Regional Board.
- b. This Monitoring Program incorporates "General Provisions for Monitoring and Reporting," dated September 1, 1994, which is included as Appendix A.

### 9. Annual Report

An Annual Report will be submitted by November 15 of each year to the Executive Officer of the Regional Board. The report will include a summary of visual observations, sampling and analysis results (including laboratory reports), the Annual Comprehensive Site Compliance Evaluation Report (Evaluation Report) required in Section 8 of the SWPPP, and an explanation of why the marina did not implement any activities required by the General Permit (if not already included in the Evaluation Report).

The Marina Operator will prepare and submit the Annual Report using the Annual Report Form provided by the Regional Board.

### 10. Records

Records of all storm water monitoring information and copies of all reports (including the Annual Reports) required by the General Permit will be retained for a period of at least five years. These records shall include:

- a. The date, place, and time of site inspections, sampling, visual observations, and/or measurements;
- b. The individual(s) who performed the site inspections, sampling, visual observations, and or measurements;
- c. Flow measurements or estimates:
- d. The date and approximate time of analyses;
- e. The individual(s) who performed the analyses;
- f. Analytical results, method detection limits, and the analytical techniques or methods used;
- g. Quality assurance/quality control records and results;
- h. Non-storm water discharge inspections and visual observations and storm water discharge visual observation records;
- i. Visual observation and sample collection exception records;
- i. All calibration and maintenance records of on-site instruments used; and,
- k. The records of any corrective actions and follow-up activities that resulted from the visual observations.

### 11. Maintenance Dredging

Meeks Bay Marina was created by dredging the mouth of Meeks Creek in the early 1960's. Maintenance dredging has occurred in the past and will likely occur in the future.

a. Prior to the start of dredging, composite background water samples will be collected from the area to be dredged (inner marina and lake access channel). These samples will be representative of the typical undisturbed conditions, and will not be taken during a runoff event. These samples will be analyzed for the following constituents:

Constituent	Units	Reporting Limit (PQL)  0.1 mg/l as N  0.008 mg/l as P  0.01 mg/l		
Total Nitrogen	mg/l as N			
Phosphate	mg/l as P			
Total Iron	mg/l			
Turbidity	NTU	0.1 NTU		
Grease and Oil	mg/l	10 mg/l		

b. Prior to the start of dredging, samples of sediment in the inner marina will be analyzed for the following constituents:


Constituent	Units	Reporting Limit (PQL)
Total Petroleum Hydrocarbons (gasoline)	mg/kg	0.5 mg/kg
Total Petroleum Hydrocarbons (diesel)	mg/kg	1 mg/kg
Polycyclic Aromatic Hydrocarbons	mg/kg	0.2 mg/kg
Benzene, Toluene, E-benzene, Xylenes	mg/kg	0.005 mg/kg

- c. During dredging activities, the monitoring program will consist of the following:
  - i. Continual visual inspections will be made of the containment structures and dredging equipment to ensure total containment of disturbed sediments and the absence of illegal discharges. If turbidity plumes are detected outside the containment structures, and/or if petroleum product sheens are detected outside the protective oil barriers, dredging shall cease immediately and action shall be taken to correct the problem.
  - ii. Daily written records will be kept of the inspections noting any problems or violations.
- d. Prior to the removal of any in-lake containment structure, a composite water sample must be collected from within the contained area. This composite sample shall consist of lake water taken from 3 locations within the contained area. This sample shall be analyzed for the constituents listed above in Section "a." Approval from the Regional Board Executive

Officer must be obtained prior to removing any containment structure. This decision will be based on water sampling results.

### 12. Reporting Requirements for Maintenance Dredging

- a. The marina operator will comply with the "General Provisions for Monitoring and Reporting," dated September 1, 1994, which is attached to and make part of this Monitoring and Reporting Program (Appendix A).
- b. The results from all required water and soil analyses will be submitted within thirty days after the containment structures are removed.

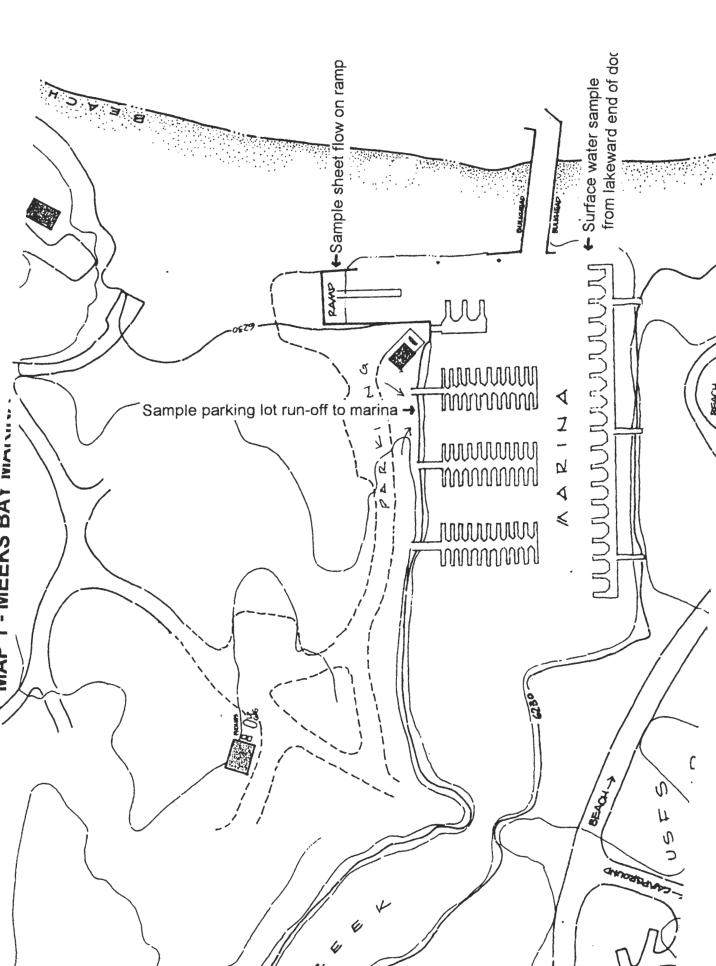

### APPENDIX A

# LAHONTAN RWQCB GENERAL PROVISIONS for MONITORING & REPORTING

# CALIFORNIA REGIONAL WATER QUALITY CONTROL BOARD LAHONTAN REGION

# GENERAL PROVISIONS FOR MONITORING AND REPORTING

### SAMPLING AND ANALYSIS

- a. All analyses shall be performed in accordance with the current edition(s) of the following documents:
  - i. Standard Methods for the Examination of Water and Wastewater
  - ii. Methods for Chemical Analysis of Water and Wastes, EPA
- b. All analyses shall be performed in a laboratory certified to perform such analyses by the California State Department of Health Services or a laboratory approved by the Regional Board Executive Officer. Specific methods of analysis must be identified on each laboratory report.
- c. Any modifications to the above methods to eliminate known interferences shall be reported with the sample results. The methods used shall also be reported. If methods other than EPA-approved methods or Standard Methods are used, the exact methodology must be submitted for review and must be approved by the Regional Board Executive Officer prior to use.
- d. The discharger shall establish chain-of-custody procedures to insure that specific individuals are responsible for sample integrity from commencement of sample collection through delivery to an approved laboratory. Sample collection, storage, and analysis shall be conducted in accordance with an approved Sampling and Analysis Plan (SAP). The most recent version of the approved SAP shall be kept at the facility.
- e. The discharger shall calibrate and perform maintenance procedures on all monitoring instruments and equipment to ensure accuracy of measurements, or shall insure that both activities will be conducted. The calibration of any wastewater flow measuring device shall be recorded and maintained in the permanent log book described in 2.b, below.
- f. A grab sample is defined as an individual sample collected in fewer than 15 minutes.
- g. A composite sample is defined as a combination of no fewer than eight individual samples obtained over the specified sampling period at equal intervals. The volume of each individual sample shall be proportional to the discharge flow rate at the time of sampling. The sampling period shall equal the discharge period, or 24 hours, whichever period is shorter.

### 2. OPERATIONAL REQUIREMENTS

### a. Sample Results

Pursuant to California Water Code Section 13267(b), the discharger shall maintain all sampling and analytical results including: strip charts; date, exact place, and time of sampling; date analyses were performed; sample collector's name; analyst's name; analytical techniques used; and results of all analyses. Such records shall be retained for a minimum of three years. This period of retention shall be extended during the course of any unresolved litigation regarding this discharge, or when requested by the Regional Board.

### b. Operational Log

Pursuant to California Water Code Section 13267(b), an operation and maintenance log shall be maintained at the facility. All monitoring and reporting data shall be recorded in a permanent log book.

### 3. REPORTING

- a. For every item where the requirements are not met, the discharger shall submit a statement of the actions undertaken or proposed which will bring the discharge into full compliance with requirements at the earliest time, and shall submit a timetable for correction.
- b. Pursuant to California Water Code Section 13267(b), all sampling and analytical results shall be made available to the Regional Board upon request. Results shall be retained for a minimum of three years. This period of retention shall be extended during the course of any unresolved litigation regarding this discharge, or when requested by the Regional Board.
- c. The discharger shall provide a brief summary of any operational problems and maintenance activities to the Board with each monitoring report. Any modifications or additions to, or any major maintenance conducted on, or any major problems occurring to the wastewater conveyance system, treatment facilities, or disposal facilities shall be included in this summary.

### d. Monitoring reports shall be signed by:

- i. In the case of a corporation, by a principal executive officer at least of the level of vice-president or his duly authorized representative, if such representative is responsible for the overall operation of the facility from which the discharge originates;
- ii. In the case of a partnership, by a general partner;
- iii. In the case of a sole proprietorship, by the proprietor; or

- iv. In the case of a municipal, state or other public facility, by either a principal executive officer, ranking elected official, or other duly authorized employee.
- e. Monitoring reports are to include the following:
  - i. Name and telephone number of individual who can answer questions about the report.
  - ii. The Monitoring and Reporting Program Number.
  - iii. WDID Number.

### f. Modifications

This Monitoring and Reporting Program may be modified at the discretion of the Regional Board Executive Officer.

### 4. NONCOMPLIANCE

Under Section 13268 of the Water Code, any person failing or refusing to furnish technical or monitoring reports, or falsifying any information provided therein, is guilty of a misdemeanor and may be liable civilly in an amount of up to one thousand dollars (\$1,000) for each day of violation.

### APPENDIX B

# WORKSHEETS for MONITORING & REPORTING

# VISUAL NON-STORM WATER INSPECTION RECORD

CITON REC	Program
IER MOFE	Monitoring
MIN WALEI	y Marina
JAL NON-SIONN	Meeks Bay
4	

Location Observed	Conditions Noted	Cause of any unauthorized discharge
Boat Ramp		
Parking Lot		
Corrective Action Taken:	.u.	

Year: 200#2#3#4	VISUAL STORM WATER INSPECTION RECORD Meeks Bay Marina Monitoring Program  (	Completed by:
Location Observed	Conditions Noted	Cause of any unauthorized discharge
Boat Ramp		
Parking Lot		
Corrective Action Taken:		

### SAMPLING RECORD Meeks Bay Marina Monitoring Program

Y	ear	*:					

STORM WAT	ER SAMPLES									
Date		Taken at/by	Sent to Lab (date)	Lab Results (date)						
1	First Storm Yes <b>No*</b>	□ Boat Ramp By:								
	First Hour Yes <b>No*</b>	□ Parking Lot By:								
Three working	days without	discharge required pri	or to second sample	•						
2		□ Boat Ramp By:								
First Hour Yes <b>No*</b>		□ Parking Lot								
*If "No," explain:										
1	1									
2.										
SURFACE SA	MPLES (from	akeward end of docks)								
Date		Taken by	Sent to Lab (date)	Lab Results (date)						
1. July 4, 200_										
2. Labor Day (9//200)										
If not taken, explain:										
1.										
2.										
	·									